

SMD Circulator 表贴式环形器


H102B Series

1.Features 产品特点

- UMTS, LTE Band
- PCB Soldering Re-flow
- Wide Operation Temperature Range -45 ~ 125℃
- Compact Package Design for PCB Applications

2.Dimensions 尺寸展示

Unit:mm

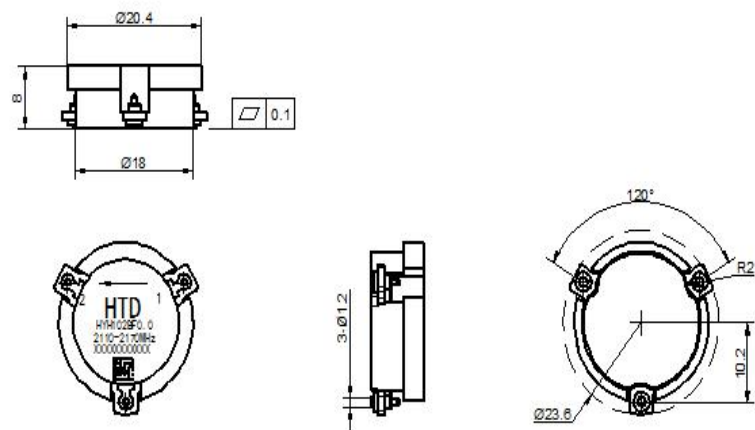

3.Specifications 规格参数

Part No.	Frequency (GHz)		Center Frequency	Bandwidth	Isolation	INS LOSS	VSWR	Power	IMD (@2X43dBm)
	F1	F2	(GHz)	(GHz)	(dB) MIN	(dB) MAX	(dB) MAX	(W)	(-dBc) MAX
HYH102BF0.0(1417-1540)MHz	1.417	1.540	1.479	0.123	23	0.25	1.15	100	-65
HYH102BF0.0(1525-1626)MHz	1.525	1.626	1.576	0.101	22	0.28	1.17	100	-65
HYH102BF0.0(1800-2200)MHz	1.800	2.200	2.000	0.400	20	0.3	1.22	100	-65
HYH102BZ0.0(1805-1880)MHz	1.805	1.880	1.843	0.075	23	0.25	1.15	100	-65
HYH102BF0.0 (1880-2025)MHz	1.880	2.025	1.953	0.145	25	0.28	0.12	100	-65
HYH102BF0.0(1930-1995)MHz	1.930	1.995	1.963	0.065	25	0.25	1.12	100	-65
HYH102BZ0.0(2110-2170)MHz	2.110	2.170	2.140	0.060	23	0.25	1.15	100	-65
HYH102BF0.0(2300-2400)MHz	2.300	2.400	2.350	0.100	23	0.25	1.15	100	-65
HYH102BZ0.0(2496-2690)MHz	2.496	2.690	2.593	0.194	25	0.28	1.12	100	-65
HYH102BF0.0(2620-2690)MHz	2.620	2.690	2.655	0.070	23	0.25	1.15	100	-65